

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 434 228 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
30.06.2004 Bulletin 2004/27

(51) Int Cl.7: **G11B 27/32**, G11B 27/034,  
G11B 27/10, G11B 20/12

(21) Application number: **04101050.5**

(22) Date of filing: **24.11.1998**

(84) Designated Contracting States:  
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU NL  
PT SE**

(30) Priority: **29.11.1997 EP 97203745**

(62) Document number(s) of the earlier application(s) in  
accordance with Art. 76 EPC:  
**98952980.5 / 0 956 557**

(71) Applicant: **Koninklijke Philips Electronics N.V.**  
**5621 BA Eindhoven (NL)**

(72) Inventor: **Mons, Johannes J. Philips Intellectual**  
**5600 AE Eindhoven (NL)**

(74) Representative: **De Vries, Jan**  
**Philips**  
**Intellectual Property & Standards**  
**P.O. Box 220**  
**5600 AE Eindhoven (NL)**

### Remarks:

This application was filed on 15 - 03 - 2004 as a  
divisional application to the application mentioned  
under INID code 62.

(54) **A method for storing audio-centered information with a multi-level Table-of-Contents (TOC) mechanism with one Master-TOC and Sub-TOCs for various audio formats, a device for use with such mechanism and a unitary storage medium containing such mechanism**

(57) Audio information is stored on a unitary storage medium with a Table-of-Contents (TOC) mechanism for therein specifying an actual configuration of various au-

dio items on the medium. In particular, one or more Sub-TOCs are each assigned to a respective different audio format. A single Master-TOC is provided for specifically pointing to each Sub-TOC.

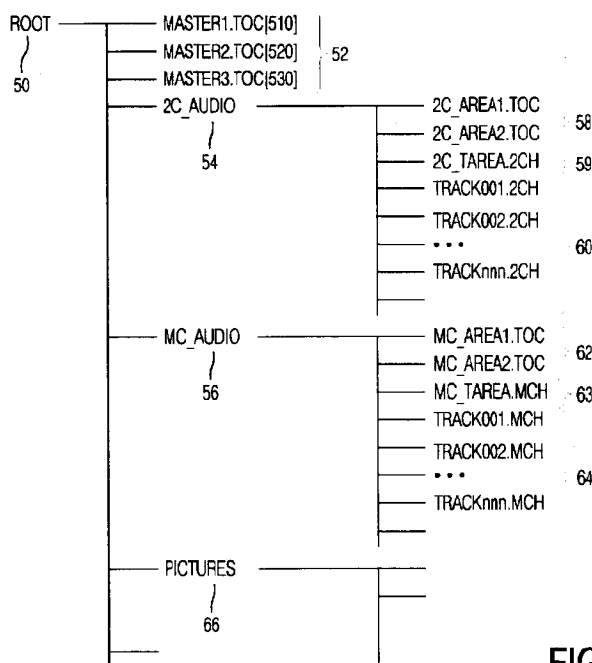


FIG. 4

EP 1 434 228 A2

## Description

[0001] The invention relates to a method as recited in the preamble of Claim 1. Digital audio storage on unitary media such as disc or tape is at present widespread. In case of actual sub-division of the audio into multiple sub-items, the providing of a **Table-of-Contents** (TOC) allows to access the information in a relatively fast manner. Generally, a TOC specifies at least **what** has been stored and **where** it has been stored. However, audio is being also defined according to multiple standardized audio formats, such as two-channel stereo, multiple (5-6) channel audio such as for use in surround sound applications, and possibly others. An audio provider may wish to combine various different such formats on a single medium such as an optical disc, and in consequence, a user would want to be able to access various audio items in a fast and easy manner.

[0002] In consequence, amongst other things, it is an object of the invention to allow the audio management system to discriminate between the various formats, and to navigate among the various items of only a single format, so that it will not be necessary to change an actual decoder strategy. Now therefore, according to one of its aspects the invention is characterized according to the characterizing part of Claim 1.

[0003] The invention also relates to a unitary storage medium produced by the method, and to a reader or player arranged for interfacing with such storage medium. One or more of the audio formats could effectively be a dummy, but for reasons of standardizing, the multilevel TOC arrangement is then also adopted. Further advantageous aspects of the invention are recited in dependent Claims.

[0004] These and further aspects and advantages of the invention will be discussed more in detail hereinafter with reference to the disclosure of preferred embodiments, and in particular with reference to the appended Figures that show:

Figures 1a, 1b a record carrier,  
Figure 2 a playback device,  
Figure 3 a recording device,  
Figure 4, a file system for use with the invention;  
Figure 5, a first storage arrangement for the invention;  
Figure 6, a second storage arrangement for the invention.

Table 1 specifies a Master\_TOC Syntax;  
Table 2 specifies a Master\_TOC\_O Syntax;  
Table 3 specifies a Disc\_Info Syntax.

[0005] Figure 1a shows a disc-shaped record carrier 11 with track 19 and central hole 10. Track 19 is arranged in a spiral pattern of turns forming substantially parallel tracks on an information layer. The carrier may be an optical disc with a recordable or a prerecorded

information layer. Examples of a recordable disc are CD-R, CD-RW, and DVD-RAM, whereas audio CD is a prerecorded disc. Prerecorded discs can be manufactured by first recording a master disc and later pressing consumer discs. Track 19 on the recordable record carrier is indicated by a providing a pre-embossed track structure during manufacture of the blank record carrier. The track may be configured as a pregroove 14 to enable a read/write head to follow the track 19 during scanning. The information is recorded on the information layer or by optically detectable marks along the track, e.g. pits and lands.

[0006] Figure 1b is a cross-section along the line b-b of a recordable record carrier 11, wherein transparent substrate 15 carries recording layer 16 and protection layer 17. The pregroove 14 may be implemented as indentation, an elevation, or as a material property deviating from its surroundings.

[0007] For user convenience, the audio information on the record carrier has been subdivided into items, which usually have a duration of a few minutes e.g. songs on an album or movements of a symphony. Usually the record carrier also contains access information for identifying the items, such as in a so-called Table Of Contents (TOC), or included in a file system like ISO 9660 for CD-ROM. The access information may include playing time and start address for each item, and also further information like a song title.

[0008] The audio information is recorded in digital representation after analog to digital (A/D) conversion. Examples of A/D conversion are PCM 16-bit per sample at 44.1 kHz known from CD audio and 1 bit Sigma Delta modulation at a high oversampling rate e.g. 64 x F<sub>s</sub> called bitstream. The latter method represents a high quality encoding method, with a choice between high quality decoding and low quality decoding, the latter allowing a simpler decoding circuit. Reference is made in this respect to documents D5 and D6 infra. After A/D conversion, digital audio is compressed to variable bitrate audio data for recording on the information layer. The compressed audio data is read from the record carrier at such a speed, that after decompression substantially the original timescale will be restored when reproducing the audio information continuously. Hence the compressed data must be retrieved from the record carrier at a speed dependent on the varying bitrate. The data is retrieved from the record carrier at so-called transfer speed, i.e. the speed of transferring data bytes from the record carrier to a de-compressor. The record carrier have uniform spatial data density, which gives the highest data storage capacity per unit of area. In such a system the transfer speed is proportional to the relative linear speed between the medium and the read/write head. If before the de-compressor a buffer has been provided, actual transfer speed is the speed before that buffer.

[0009] Figure 2 shows a playback apparatus according to the invention for reading a record carrier 11 of the

type shown in Figure 1. The device has drive means 21 for rotating record carrier 11 and a read head 22 for scanning the record carrier track. Positioning means effect 25 coarse radial positioning of read head 22. The read head comprises a known optical system with a radiation source for generating a beam 24 that is guided through optical elements and focused to spot 23 on an information layer track. The read head further comprises a focusing actuator for moving the focus of the radiation 24 along the optical axis of the beam and a tracking actuator for fine positioning of spot 23 in a radial direction on the centre of the track. The tracking actuator may comprise coils for moving an optical element or may be arranged for changing the angle of a reflecting element. The radiation reflected by the information layer is detected by a known detector in the read head 22, e.g. a four-quadrant diode, to generate a read signal and further detector signals including a tracking error and focusing error signals for the tracking and focusing actuators, respectively. The read signal is processed by a reading means 27 to retrieve the data, which reading means are of a usual type for example comprising a channel decoder and an error corrector. The retrieved data is passed to a data selection means 28, to select the compressed audio data for passing on to buffer 29. The selection is based on data type indicators also recorded on the record carrier, e.g. headers in a framed format. From buffer 29, the compressed audio data are passed on to de-compressor 31 as signal 30. This signal may also be outputted to an external de-compressor. De-compressor 31 decodes the compressed audio data to reproduce the original audio information on output 32. The de-compressor may be fitted in a stand-alone high quality audio D/A converter 33. Alternatively, the buffer may be positioned before the data selections means. The buffer 29 may be positioned in a separate housing or may be combined with a buffer in the decompressor. The device furthermore has a control unit 20 for receiving control commands from a user or from a host computer not shown, that via control lines 26 such as a system bus is connected to drive means 21, positioning means 25, reading means 27 and data selection means 28, and possibly also to buffer 29 for buffer filling level control. To this end, the control unit 20 may comprise control circuitry, such as a microprocessor, a program memory and control gates, for performing the procedures described below. Control unit 20 may be implemented as a logic circuit state machine.

**[0010]** The art of audio compression and de-compression is known. Audio may be compressed after digitizing by analyzing the correlation in the signal, and producing parameters for fragments of a specified size. During de-compression the inverse process reconstructs the original signal. If the original digitized signal is reconstructed exactly, the (de-)compression is lossless, whereas lossy (de-)compression will not reproduce certain details of the original signal which however are substantially undetectable by the human ear or eye. Most known sys-

tems for audio and video, such as DCC or MPEG, use lossy compression, whereas lossless compression is used for storing computer data. Examples of audio compression and decompression can be found in D2, D3 and D4 hereinafter, of which in particular the lossless compression from D2 is suitable for high quality audio.

**[0011]** According to the invention, data selection means 28 are arranged to retrieve from the read data certain control information. The data selection means 28 are also arranged to discard any stuffing data, that had been added during recording. When the control unit 20 is commanded to reproduce an item of audio from the record carrier, the positioning means 25 are controlled to position the reading head on the portion of the track containing the TOC. The starting address for that item will then be retrieved from the TOC via the data selection means 28. Alternatively the contents of the TOC may be read only once and stored in a memory when the disc is inserted in the apparatus. For reproducing the item the drive means 21 are controlled to rotate the record carrier at an appropriate rotary velocity, to be derived from timing indications stored with the audio. The radial position of the item can be calculated as based on the starting address, because the record carrier density parameters like track pitch and bit length, are predetermined and known to the playback device, usually from a standard. Subsequently the rotation rate can be derived from the bitrate and the radial position.

**[0012]** To provide continuous reproduction without buffer underflow or overflow the transfer speed is coupled to the reproduction speed of the D/A converter, i.e. to the bitrate after decompression. To this end the apparatus may comprise a reference frequency source for controlling the decompressor and the rotation rate may be set in dependence on the reference frequency and the speed profile. Alternatively or additionally the rotation rate may be adjusted using the average filling level of buffer 29, e.g. decreasing the rotation rate when the buffer is more than 50% full on average.

**[0013]** Figure 3 shows a recording device according to the invention for writing information on a (re)writable record carrier 11. During a writing operation, marks representing the information are formed on the record carrier. The marks may be in any optically readable form, e.g. in the form of areas whose reflection coefficient differs from their surroundings, by recording in materials such as dye, alloy or phase change, or in the form of areas with a direction of magnetization different from their surroundings when recording in magneto-optical material. Writing and reading of information for recording on optical disks and usable rules for formatting, error correcting and channel coding, are well-known, e.g. from the CD system. Marks may be formed through a spot 23 generated on the recording layer via a beam 24 of electromagnetic radiation, usually from a laser diode. The recording device comprises similar basic elements as described with reference to Figure 2, i.e. a control unit 20, drive means 21 and positioning means 25, but

it has a distinct write head 39. Audio information is presented on the output of compression means 35, which may be placed in a separate housing. Suitable compression has been described in D2, D3 and D4. The variable bitrate compressed audio on the output of the compression means 35 is passed to buffer 36. From buffer 36 the data is passed to data combination means 37 for adding stuffing data and further control data. The total data stream is passed to writing means 38 for recording. Write head 39 is coupled to the writing means 38, which comprise for example a formatter, an error encoder and a channel encoder. The data presented to the input of writing means 38 is distributed over logical and physical sectors according to formatting and encoding rules and converted into a write signal for the write head 39. Unit 20 is arranged for controlling buffer 36, data combination means 37 and writing means 38 via control lines 26 and for performing the positioning procedure as described above for the reading apparatus. Alternatively the recording apparatus may be arranged for reading having the features of the playback apparatus and a combined write/read head.

[0014] Figure 4 shows a file system for use with the invention, for which various different options are feasible. As main choices the inventors have proposed that the storage medium should be based on either the UDF file system or the ISO 9660 file system, which systems are standard to the skilled artisan. In the alternative case, no file system would be present at all and the relevant sector spaces should be kept empty.

[0015] If a file system is present however, all audio will be stored in Audio Files, that are located in SubDirectory **SCD\_AUDIO**. As shown in Figure 4, the hierarchy is based on **ROOT** file 50 that points to various subaltern files 52, 54, 56, 66 as shown. The structure of **MASTER.TOC** 52 will be discussed hereinafter. Furthermore, there is a **2C\_AUDIO** file 54. This points to **TOC 2C\_AREA.TOC** 58 and in parallel therewith to the various stereo tracks **TRACKn.2CH** 60. Furthermore, there is **MC\_AUDIO** file 56. This points to **TOC MC\_AREA.TOC** 62 and in parallel therewith to the various stereo tracks **TRACKn.MCH** 64. For reasons of safety, the **MASTER.TOC** has been provided in three contiguously positioned copies **MASTER1..3.TOC** 52. Likewise for reasons of safety, the subaltern TOCs have been provided in two copies **2C\_AREA1,2.TOC** 58 and **MC\_AREA1,2.TOC** 62, respectively. These two copies are positioned before and behind, respectively, the associated audio. As a further feature, the audio formats have an additional overall file each, **2C\_TAREA.2CH** 59 and **MC\_TAREA.MCH** that contain the file information of all associated track files, respectively. Finally, a picture file 66 has been provided that may be related to a similar organization as has been provided for the audio.

[0016] Figure 5 shows a first storage arrangement for use with the invention, which by way of example has been mapped on a single serial track. Along the horizontal axis the following items are evident. Item 120 is

a **Lead-in** area that is used for mutually synchronizing the reader and the driving of the medium. Item 122 represents the **File System** that has been disclosed with reference to Figure 4. Item 124 represents a **TOC** that may be configured according to standard procedures and pertains to subsequent items **Stereo Audio Item** 126 and **Multi-channel Audio Item** 128, and if necessary also to **Extra Data** Item 130. The length of item 124 need not be standardized, inasmuch as various different amounts of information may be present. Item 126 represents **Stereo Audio Information**, that may be defined according to a conventional standard and by itself does not constitute part of the invention. Item 128 represents **Multi Channel Audio Information**, that may be defined according to a conventional standard and by itself does not constitute part of the invention. Generally, the two audio data items have the same structure and contain the same kind of information, apart from the distinguishing relations of the various channels. The audio may be plain coded or lossless coded. All kinds of audio may be multiplexed with supplementary data such as Compact Disc Text.

[0017] Item 132 represents **Extra Data Information** that may be defined in a conventional standard and by itself does not constitute part of the invention. Item 132 represents a **Lead-out Information**. The latter item is used in particular during search operations. The number of lead-out tracks may be large enough to cover a ring of some 0.5 millimeter wide. According to the above, the stored information may either be accessed via the file system laid down in item 122, or via the TOC structure laid down in item 124, and more particularly, via a two-level TOC structure.

[0018] Figure 6 shows a second storage arrangement for use with the invention, pertaining to a two-level TOC structure. Along the horizontal axis the following items are evident, next to items that have already been shown in Figure 5 and carry the same reference numerals. For clarity, items 120 and 132 have been suppressed.

[0019] **Master TOC** 134 begins at a uniformly standardized offset position with respect to the start of the Lead-in area at byte number 510. According to the embodiment, the Master-TOC measures only one standard-size sector and primarily contains pointers to the various Sub-TOCs or Area-TOCs. A preferred syntax of the Master-TOC has a header with a **Signature** that identifies the Master-TOC, such as by "SACD Master TOC". Furthermore, items 1 and 2 specify the precise syntax of the Master-TOC. The syntax has been given in element notation, together with the associated parameters. **Master\_TOC\_Signature** is an 8 byte sequence identifying the Master TOC. The value of **Master\_TOC\_Signature** must be "SACDMTC" (53 \$41 \$43 \$44 \$45 \$54 \$4F \$43).

[0020] Likewise Table 3 specifies the disc info syntax in the same manner. In particular:

2CH\_TOC\_1\_Address is a 5 byte integer contain-

ing the logical sector number (LSN) of the first sector of Area TOC-1 in the 2 Channel Stereo Area. If the 2-Channel Stereo Area is not present, the value of 2CH\_TOC\_1\_Address must be zero.

2CH\_TOC\_2\_Address is a 4 byte integer containing the LSN of the first sector of Area TOC-2 in the 2 Channel Stereo Area. If the 2-Channel Stereo Area is not present, the value of 2CH\_TOC\_2\_Address must be zero.

MC\_TOC\_1\_Address is a 4 byte integer containing the LSN of the first sector of Area TOC-1 in the Multi Channel Stereo Area. If the Multi Channel Area is not present, the value of MC\_TOC\_1\_Address must be zero.

MC\_TOC\_2\_Address is a 4 byte integer containing the LSN of the first sector of Area TOC-2 in the Multi Channel Stereo Area. If the Multi Channel Area is not present, the value of MC\_TOC\_2\_Address must be zero.

**[0021]** The format of Disc\_Flags must be as follows: a hybrid bit and seven reserved bits.

**[0022]** The Hybr bit must be set to one on a Hybrid Disc. The Hybr bit must be set to zero on a not-Hybrid Disc.

#### List of related documents

#### **[0023]**

(D1) Research Disclosure number 36411.

August 1994, page 412-413

(D2) PCT/IB97/01156 (PHN 16.452)

1 bit ADC and lossless compression of audio

(D3) PCT/IB97/01303 (PHN 16.405)

Audio compressor

(D4) EP-A 402,973 (PHN 13.241)

Audio compression

(D5) 'A digital decimating filter for analog-to-digital conversion of hi-fi audio signals', by J.J. van der Kam in Philips Techn. Rev. 42, no. 6/7, April 1986, pp. 230-8

(D6) 'A higher order topology for interpolative modulators for oversampling A/D converters', by Kirk C. H. Chao et al in IEEE Trans. on Circuits and Systems, Vol 37, no. 3, March 1990, pp. 309-18.

#### **Claims**

1. A method for storing audio-centered information on an optically readable disc (11) while using a Table-Of-Content (TOC) mechanism for therein specifying an actual configuration of various audio items on said disc (11),  
assigning at least two Sub-TOCs (2C\_Areal.TOC, MC-Areal.TOC) with identical information to each one of a set of at least two Track Areas (126,

128,130), thereby allowing retrieving any constituent Sub-TOC part from at least any correct copy of said sub-TOCs (2C\_Area2.TOC, MC\_Area2.TOC),

providing at least one Master-TOC (124) comprising information on the location of said Sub-TOCs, being **characterized by** having abutting said sub-TOCs at mutually opposite ends to their associated track Area (126,128,130) and

by having the Master-TOC (124) pointing to each of said Sub-TOCs (2CH\_TOC\_1\_Address, 2CH\_TOC\_2\_Address, MC\_TOC\_1\_Address, MC\_TOC\_2\_Address).

2. A method as claimed in Claim 1, wherein the number of said Sub-TOCs per Track Area (126, 128, 130) is exactly 2.
3. A method as claimed in Claim 1, and furthermore providing any Master-TOC (124) at a standard offset location with respect to an initial location of said disc (11).
4. An optically readable disc (11) with audio-centered stored thereon, comprising  
a Table-Of-Content for specifying an actual configuration of various audio items on said disc, the disc comprising:

at least two Sub-TOCs (2C\_Area1.TOC, MC\_Area1.TOC) with identical information to each one of a set of at least two Track Areas (126, 128, 130), for retrieving any constituent Sub-TOC part from at least any correct copy of said Sub-TOCs (2C\_Area2.TOC, MC\_Area2.TOC)

at least one Master-TOC (124) comprising information on the location of said sub-TOCs,

**characterized in that,**

said sub-TOCs abut at mutually opposite ends to their associated track Area (126, 128, 130) and

the Master-TOC (124) pointing to each of said Sub-TOCs (2CH\_TOC\_1\_Address, 2CH\_TOC\_2\_Address, MC\_TOC\_1\_Address, MC\_TOC\_2\_Address).

5. An optically readable disc (11) as claimed in claim 4, **characterized in that**, the number of sub-TOCs is exactly 2.
6. An optically readable disc (11) as claimed in claim 4, **characterized in that**, any Master-TOC (124) is located at a standard offset location with respect to an initial location of said optical disc (11).
7. A reader device comprising optical read means (22), disc drive (21) means for driving a disc track

(19) along said optical read means (22) and a control unit (20) for controlling said reading, the control unit (20) adapted to read from said disc (11) a Table-Of-Content (2C\_Area1.TOC, MC\_Area2.TOC) specifying an actual configuration of various audio items (60,64) stored on said disc (11), **characterized in that,**

the control unit (20) is further adapted to retrieve a correct copy of at least two Sub-TOCs (2C\_Area2.TOC, MC\_Area2.TOC) with identical information on said disc (11), wherein said sub-TOCs abut at mutually opposite ends to their associated track Area (126, 128, 130), by using pointer information stored in at least one Master-TOC (124) pointing to each of said sub-TOCs (2CH\_TOC\_1\_Address, 2CH\_TOC\_2\_Address, MC\_TOC\_1\_Address, MC\_TOC\_2\_Address).

8. A reader device as claimed in claim 7, **characterized in that,** the control unit (20) is adapted to locate said Master-TOC(124) at a standard offset location with respect to an initial location of said optical disc (11).

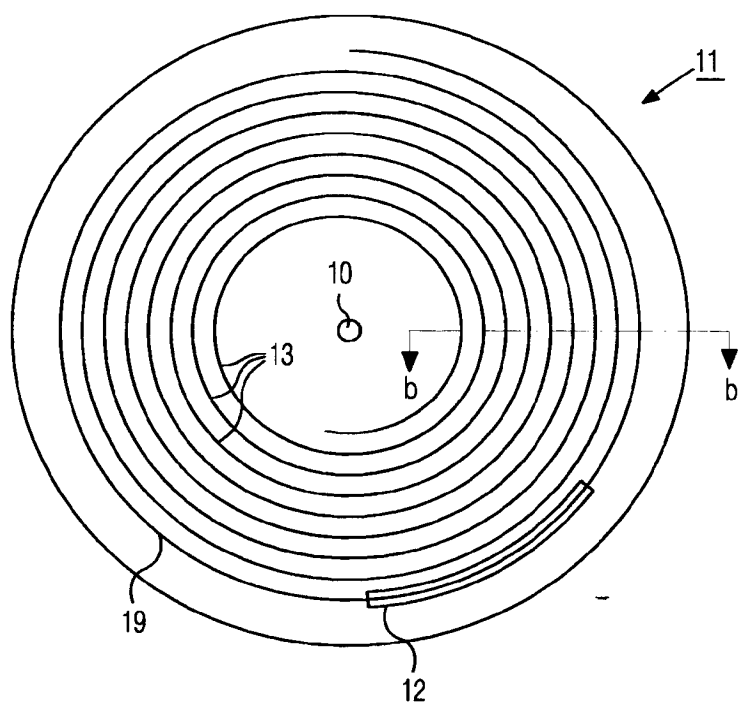


FIG. 1a




FIG. 1b

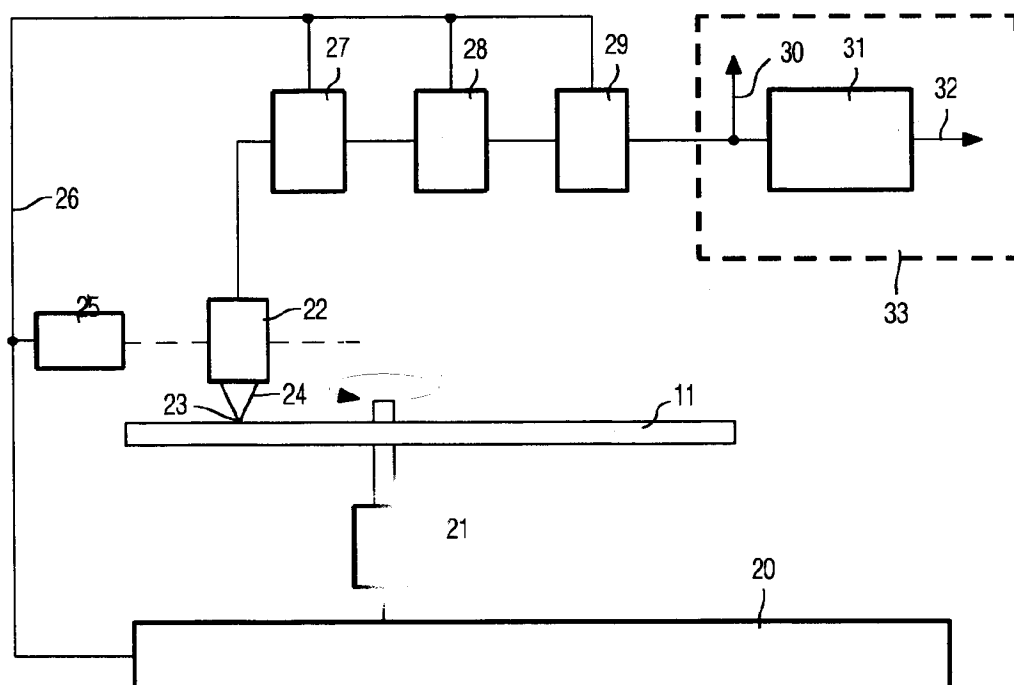


FIG. 2

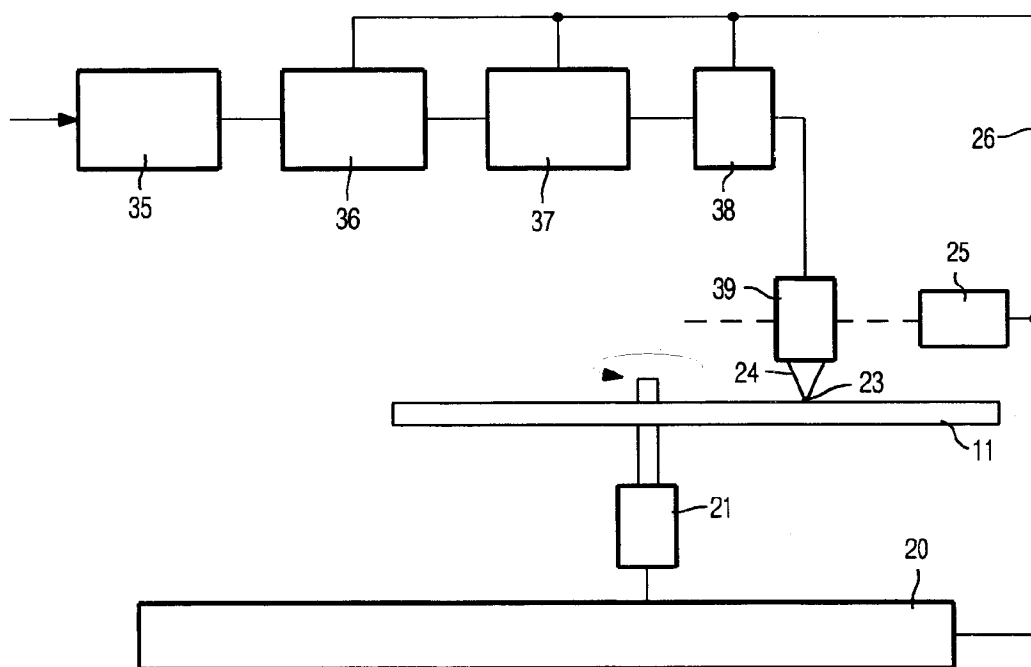


FIG. 3



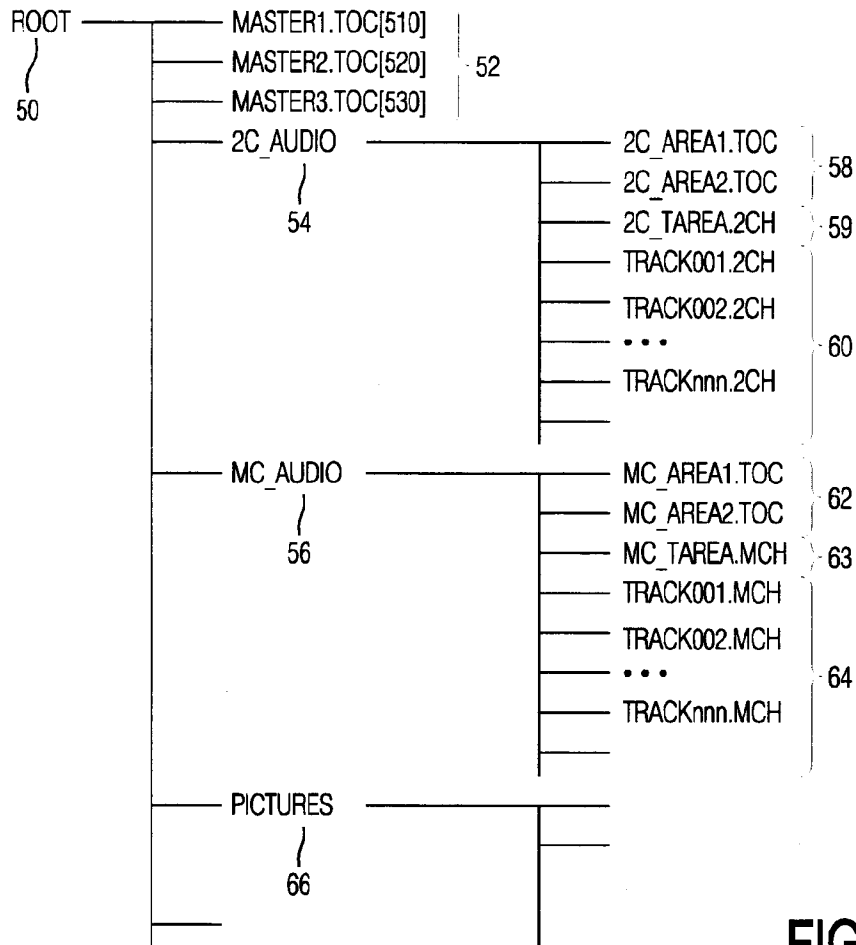


FIG. 4

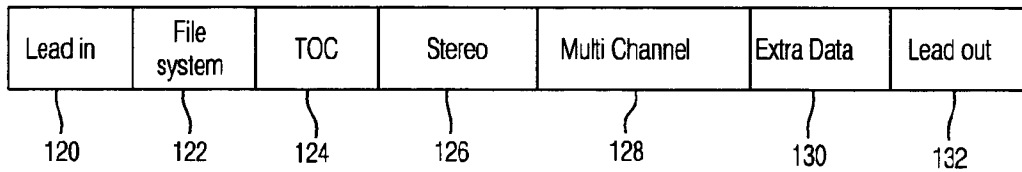


FIG. 5

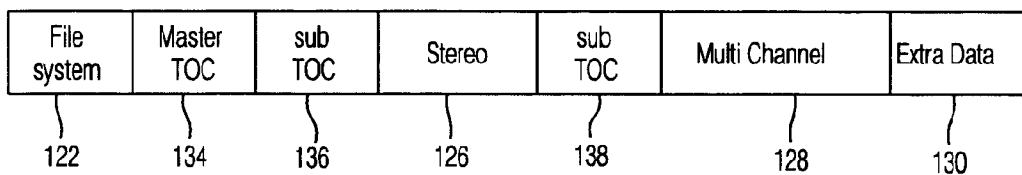


FIG. 6

	# bytes	format
Master_TOC ( ) {		
Master_TOC_0 ( )	2048	Master_TOC_0
for (c=1; c<=8; c++)		
{		
Master_Text [c]	2048	Master_Text
}		
Manuf_Info()	2048	Manuf_Info
}		

Table 1

	# bytes	format	value
Master_TOC_0 ( ) {			
M_TOC_0_Header ( )	16	M_TOC_0_Header	
Album_Info ( )	48	Album_Info	
Disc_Info ( )	64	Disc_Info	
Text_Channels ( )	40	Text_Channels	
Reserved	until 2048	UInt8	0
}			

Table 2

	# bytes	format	value
Disc_Info ( ) {			
2CH_TOC_1_Address	4	UInt32	
2CH_TOC_2_Address	4	UInt32	
MC_TOC_1_Address	4	UInt32	
MC_TOC_2_Address	4	UInt32	
Disc_Flags ( )	1	Disc_Flags	
Reserved	3	UInt8	0
2CH_TOC_Len	2	Unit16	
MC-TOC_Len	2	Unit16	
Disc_Catalog_Number	16	String	
Disc_Genre ( )	16	Genre4	
Disc_Date	4	Date	
Reserved	4	UInt8	0
/* ** Disc text files are in Master_Text [c] with c=1..8 ** */			
}			

Table 3

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 434 228 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
**30.11.2005 Bulletin 2005/48**

(51) Int Cl.7: **G11B 27/32, G11B 27/034,  
G11B 27/10, G11B 20/12**

(43) Date of publication A2:  
**30.06.2004 Bulletin 2004/27**

(21) Application number: **04101050.5**

(22) Date of filing: **24.11.1998**

(84) Designated Contracting States:  
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU NL  
PT SE**

(30) Priority: **29.11.1997 EP 97203745**

(62) Document number(s) of the earlier application(s) in  
accordance with Art. 76 EPC:  
**98952980.5 / 0 956 557**

(71) Applicant: **Koninklijke Philips Electronics N.V.  
5621 BA Eindhoven (NL)**


(72) Inventor: **Mons, Johannes J. Philips Intellectual  
5600 AE Eindhoven (NL)**

(74) Representative: **De Vries, Jan  
Philips  
Intellectual Property & Sandards  
P.O. Box 220  
5600 AE Eindhoven (NL)**

(54) **A method for storing audio-centered information with a multi-level Table-of-Contents (TOC) mechanism with one Master-TOC and Sub-TOCs for various audio formats, a device for use with such mechanism and a unitary storage medium containing such mechanism**

(57) Audio information is stored on a unitary storage medium with a Table-of-Contents (TOC) mechanism for therein specifying an actual configuration of various au-

dio items on the medium. In particular, one or more Sub-TOCs are each assigned to a respective different audio format. A single Master-TOC is provided for specifically pointing to each Sub-TOC.

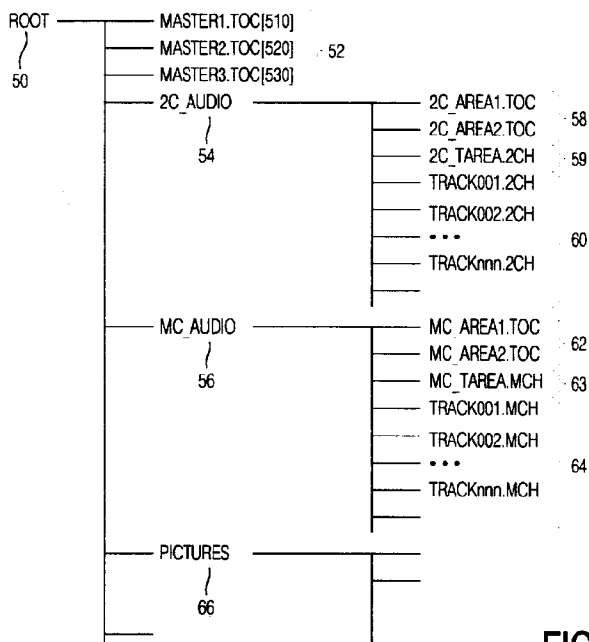

**FIG. 4**

**EP 1 434 228 A3**



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 04 10 1050

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 676 761 A (SONY CORPORATION) 11 October 1995 (1995-10-11) * column 2, line 43 - line 51 * * column 16, line 37 - column 17, line 2 * * column 29, line 30 - line 14 * * column 34, line 6 - column 35, line 34; claims 15-32 *	1,4,7	G11B27/32 G11B27/034 G11B27/10 G11B20/12
A	WO 96/19807 A (PHILIPS ELECTRONICS N.V.; PHILIPS NORDEN AB) 27 June 1996 (1996-06-27) * page 1, line 21 - page 2, line 7 * * page 3, line 19 - line 32 * * page 5, line 30 - page 7, line 18 * * page 8, line 34 - page 9, line 16 *	1,4,7	
A	EP 0 709 843 A (SONY CORPORATION) 1 May 1996 (1996-05-01) * column 19, line 3 - line 51; figure 18 *	1,2,4,5,7	
A	EP 0 613 144 A (SONY CORPORATION) 31 August 1994 (1994-08-31) * page 1, line 9 - line 5 * * page 6, line 50 - page 7, line 51; figure 3 *	1,3,4,6-8	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G11B
A	EP 0 777 227 A (SONY CORPORATION) 4 June 1997 (1997-06-04) * the whole document *	1,4,7	
P,A	EP 0 817 195 A (SONY CORPORATION) 7 January 1998 (1998-01-07) * the whole document *	1,4,7	
A	EP 0 487 331 A (CANON KABUSHIKI KAISHA) 27 May 1992 (1992-05-27) * the whole document *	1,4,7	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 6 October 2005	Examine Daalmans, F
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &amp;: member of the same patent family, corresponding document</p>			

EPO FORM 1503 (2.82 (IP/4001))

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 10 1050

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-10-2005

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0676761	A	11-10-1995	AU 681709 B2	04-09-1997
			AU 7864594 A	08-05-1995
			CN 1117321 A	21-02-1996
			DE 69429651 D1	21-02-2002
			DE 69429651 T2	19-09-2002
			WO 9511508 A1	27-04-1995
			US 6122646 A	19-09-2000
WO 9619807	A	27-06-1996	AT 226750 T	15-11-2002
			CN 1144011 A	26-02-1997
			DE 69528636 D1	28-11-2002
			DE 69528636 T2	26-06-2003
			JP 9509776 T	30-09-1997
			TW 525822 Y	21-03-2003
			US 6370102 B1	09-04-2002
EP 0709843	A	01-05-1996	AU 700123 B2	24-12-1998
			AU 3457195 A	09-05-1996
			DE 69530263 D1	15-05-2003
			DE 69530263 T2	01-04-2004
			US 5740435 A	14-04-1998
EP 0613144	A	31-08-1994	DE 69422535 D1	17-02-2000
			DE 69422535 T2	25-05-2000
			US 5687397 A	11-11-1997
EP 0777227	A	04-06-1997	AT 214833 T	15-04-2002
			AU 709193 B2	26-08-1999
			AU 5845596 A	18-12-1996
			BR 9606403 A	28-10-1997
			CN 1495778 A	12-05-2004
			CN 1495779 A	12-05-2004
			CN 1159245 A	10-09-1997
			DE 69619938 D1	25-04-2002
			DE 69619938 T2	17-10-2002
			WO 9638842 A1	05-12-1996
			US 6130870 A	10-10-2000
			US 6058091 A	02-05-2000
			US 5926448 A	20-07-1999
EP 0817195	A	07-01-1998	AT 284070 T	15-12-2004
			CN 1495724 A	12-05-2004
			CN 1179589 A	22-04-1998
			DE 69731791 D1	05-01-2005
			JP 10021673 A	23-01-1998
			US 6072759 A	06-06-2000

EPC FORM 5065

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 10 1050

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-10-2005

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0487331	A	27-05-1992	DE 69126278 D1	03-07-1997
			DE 69126278 T2	30-10-1997
			JP 0186447 A	03-07-1992
-----				

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82